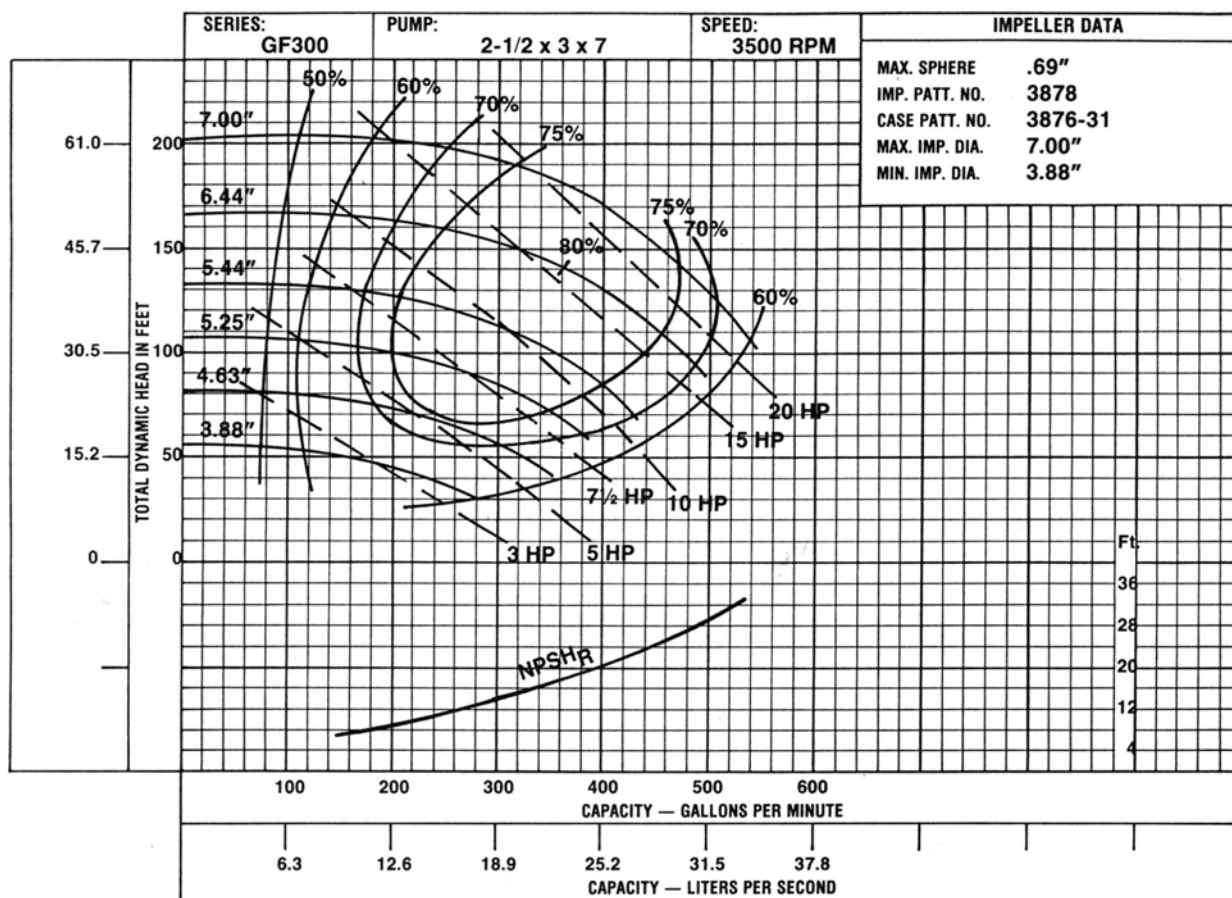


Exhibit 7-1

Series GF300 Performance

FLANGED CONNECTIONS — BRONZE FITTED

AERMOTOR®


Performance based upon 80°F fresh water (1.0 sp. gravity) at sea level.

MODEL		HP	IMPELLER DIAMETER	CAPACITIES IN GPM																		SHUT OFF HEAD
1 PHASE	3 PHASE			TOTAL DYNAMIC HEAD IN FEET																		
				35	40	45	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	
GF300-3S	GF300-3T	3	3.88		232	195	158														56	
GF300-5S	GF300-5T	5	4.63				323	282	221												81	
GF300-7S	GF300-7T	7½	5.25						353	320	272	200									107	
GF300-10S	GF300-10T	10	5.44								386	354	312	260							133	
	GF300-15T	15	6.44										450	429	400	362	320				166	
	GF300-20T	20	7.00											514	495	474	455	428	402	366	316	201

Exhibit 7-2

Series GF400 Performance

FLANGED CONNECTIONS — BRONZE FITTED

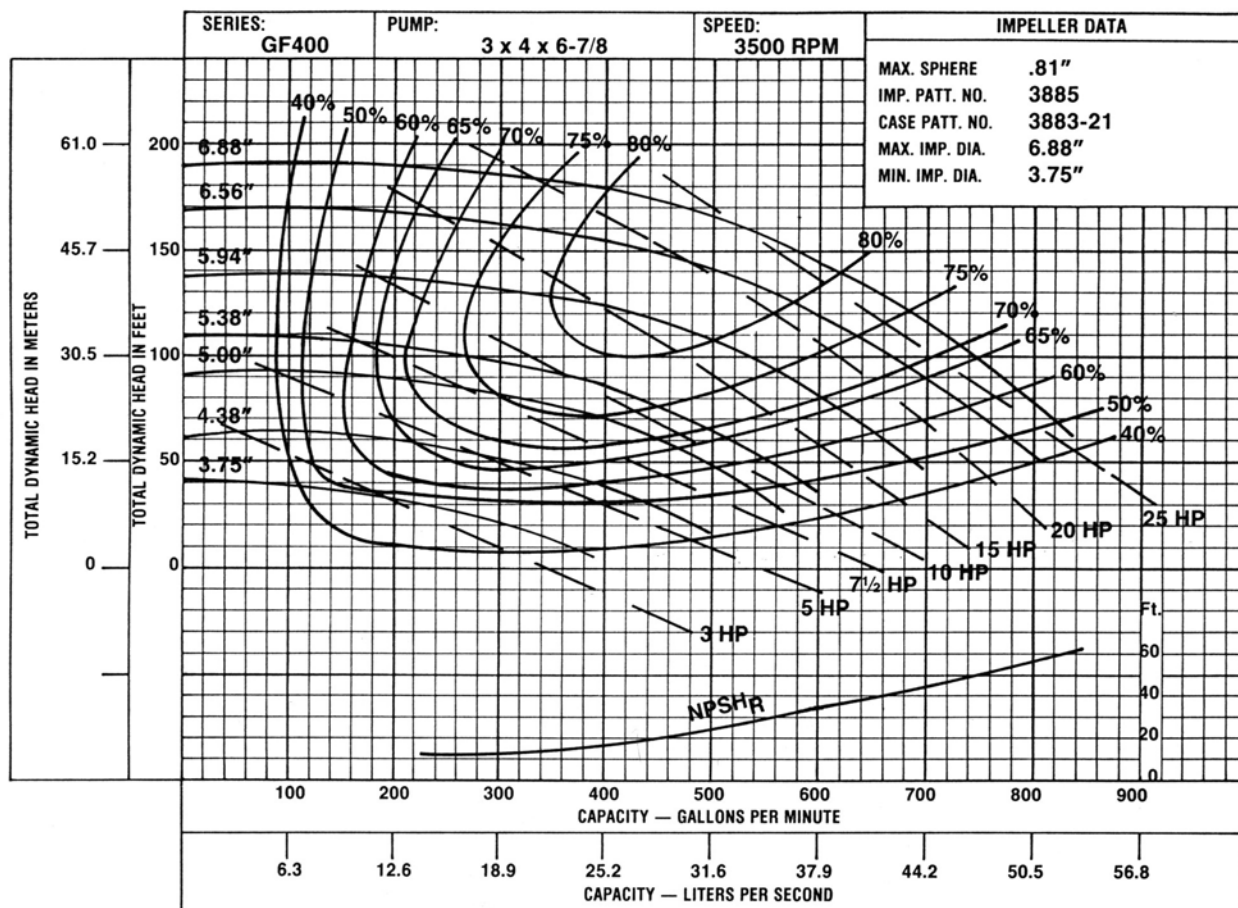AERMOTOR®


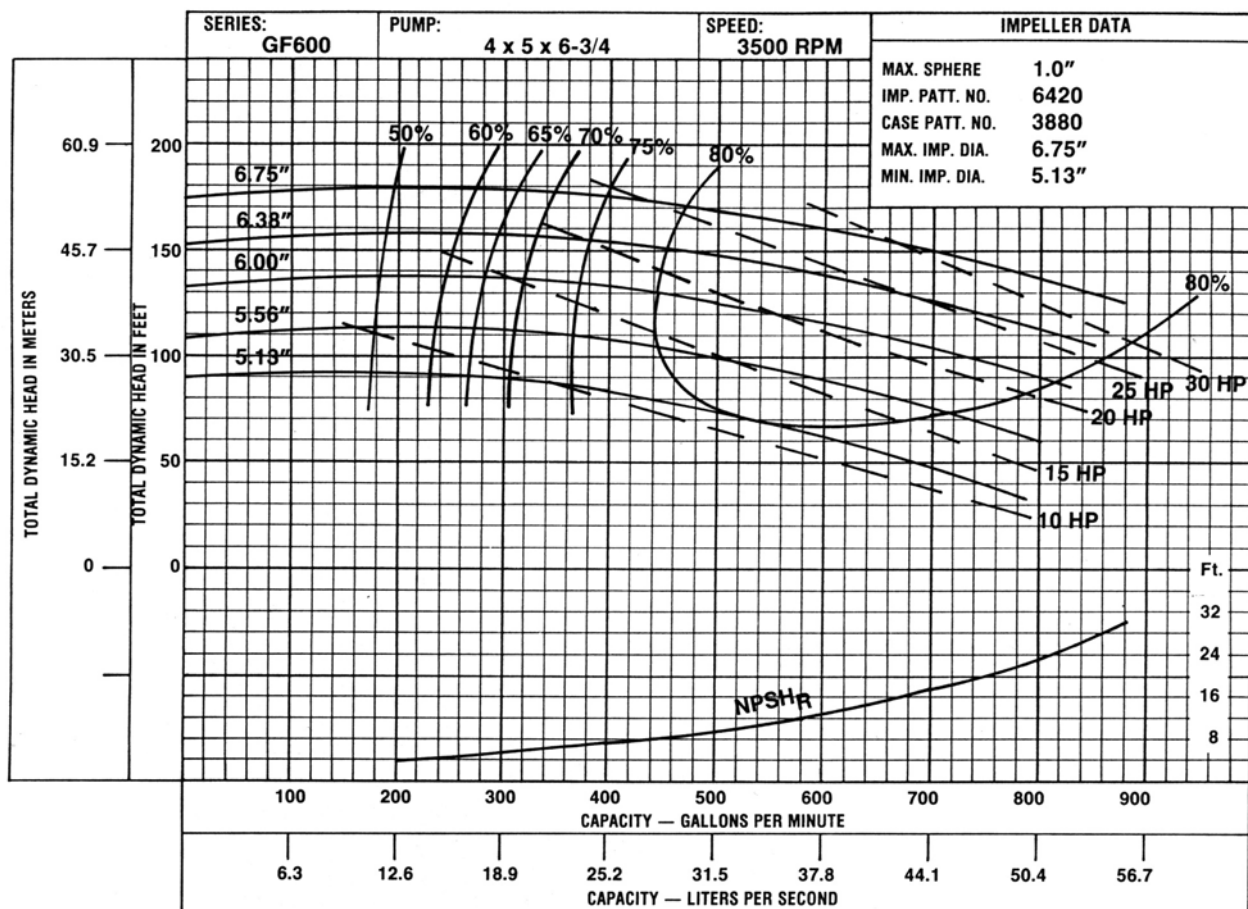
Performance based upon 80°F fresh water (1.0 sp. gravity) at sea level.

MODEL		HP	IMPELLER DIAMETER	CAPACITIES IN GPM																		SHUT OFF HEAD
1 PHASE	3 PHASE			TOTAL DYNAMIC HEAD IN FEET																		
				30	35	40	45	50	60	70	80	90	100	110	120	130	140	150	160	170	180	
GF400-3S	GF400-3T	3	3.75	228																	42	
GF400-5S	GF400-5T	5	4.38	442	415	388	349	310													61	
GF400-7S	GF400-7T	7½	5.00			526	510	493	451	400	320										91	
GF400-10S	GF400-10T	10	5.38						516	478	431	371	272								110	
	GF400-15T	15	5.94							634	604	591	536	489	428	322					137	
	GF400-20T	20	6.56									693	668	632	596	558	506	440	325		168	
	GF400-25T	25	6.88										744	716	687	654	615	580	528	473	388	189

Exhibit 7-3

Series GF600 Performance

FLANGED CONNECTIONS — BRONZE FITTED

AERMOTOR®


Performance based upon 80°F fresh water (1.0 sp. gravity) at sea level.

MODEL		HP	IMPELLER DIAMETER	CAPACITIES IN GPM																		SHUT OFF HEAD
1 PHASE	3 PHASE			TOTAL DYNAMIC HEAD IN FEET																		
				30	35	40	45	50	60	70	80	90	100	110	120	130	140	150	160	170	180	
GF600-10S	GF600-10T	10	5.13					685	612	532	436											89
	GF600-15T	15	5.56							733	668	591	495									108
	GF600-20T	20	6.00									800	734	652	556							133
	GF600-25T	25	6.38											820	748	671	586					153
	GF600-30T	30	6.75													848	776	700	597			174